


ANTIKA DOUBLE HORIZONTAL



ANTIKA DOUBLE HORIZONTAL


Material	steel pipes \varnothing 28 mm / steel profiles 50 x 10 mm
Connection thread	4 x G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	56, 78, 100

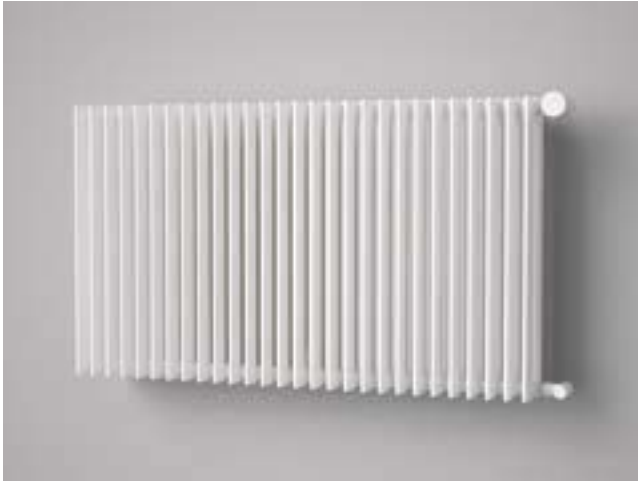



ANTIKA DOUBLE HORIZONTAL 576 x 1000

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20°C	70/55/20°C	55/45/20°C	paint [W]	chrome [W]	
576/1000	128	43,0	11,5	1,262	1523	1241	799	-	-	540
576/1400	128	60,0	16,1	1,262	2111	1720	1108	-	-	540
576/1800	128	77,0	20,6	1,262	2700	2199	1417	-	-	540

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

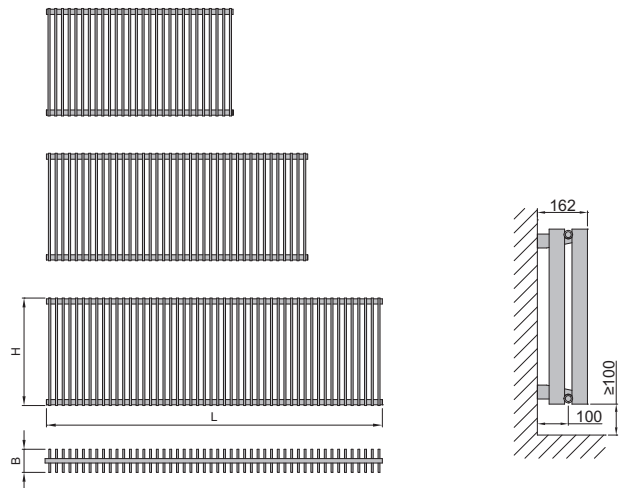

DAND 0576 1000... DAND 0576 1400... DAND 0576 1800...