

ARUBA DOUBLE HORIZONTAL



ARUBA DOUBLE HORIZONTAL


Material	steel pipes \varnothing 28 mm / steel pipes \varnothing 22 mm
Connection thread	4 \times G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	56, 78, 100



ARUBA DOUBLE HORIZONTAL 576 \times 1000

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
576/1000	70	22,5	11,8	1,282	1135	922	582	-	-	540
576/1400	70	31,5	16,4	1,282	1581	1284	811	-	-	540
576/1800	70	40,5	21,0	1,282	2026	1645	1040	-	-	540

Thermal power measuring follows in accordance with EN 442.
Accessories (page 64, 65 and 66) is not part of the radiator.

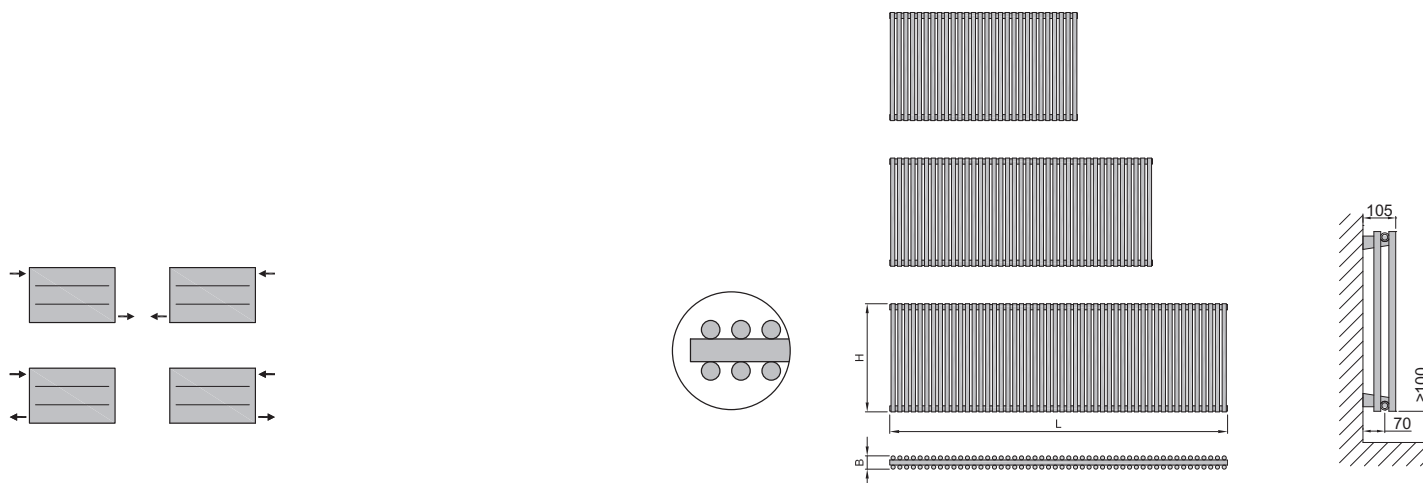

Connection options

DARD 0576 1000... DARD 0576 1400... DARD 0576 1800...