

LINOSIA	
Material	steel pipes $\varnothing$ 26 mm / steel profiles D35 x 41 mm
Connection thread	4 x G1/2"
Testing overpressure	1,3 MPa
Max. operating overpressure	1,0 MPa
Max. operating temperature	110 °C
Number of pipes	14, 22, 33




LINOSIA 1180 x 600








Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
730/500	35	6,6	4,2	1,229	347	284	185	300	200	459
730/600	35	7,7	4,8	1,229	406	332	217	400	300	559
1180/500	35	10,5	6,6	1,272	546	444	285	600	400	459
1180/600	35	12,1	7,6	1,272	638	519	333	600	400	559
1765/500	35	15,6	9,9	1,249	836	682	442	800	600	459
1765/600	35	18,1	11,4	1,249	976	797	516	1000	700	559

Thermal power measuring follows in accordance with EN 442.  
 Chrome surface treatment reduces heating capacity by ~30 %.  
 Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

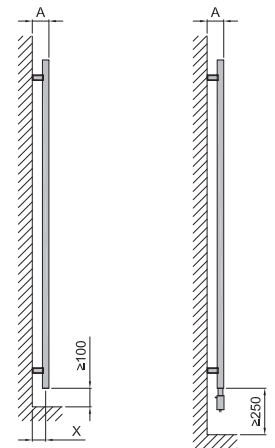

	A [mm]	X [mm]
Plastic brackets (RAL 9006, 9016)	93-103	75-85
Metal brackets (Other colours)	87-97	69-79

DLIN 0730 0500...  
DLIN 0730 0600...

DLIN 1180 0500...  
DLIN 1180 0600...

DLIN 1765 0500...  
DLIN 1765 0600...