



## QUADRAT


Material	steel profiles 40 × 40 mm
	steel profiles horizontal 25 × 25 mm
Connection thread	4 × G1/2"
Testing overpressure	0,65 MPa
Max. operating overpressure	0,5 MPa
Max. operating temperature	110 °C
Number of profiles	21, 29





QUADRAT 1255 × 600

Type H/L [mm]	Depth B [mm]	Weight [kg]	Water capacity [l]	Temperature exponent [n]	Heating Output [W]			Recommended power input		Connection span [mm]
					75/65/20 °C	70/55/20 °C	55/45/20 °C	paint [W]	chrome [W]	
1255/500	40	15,0	7,7	1,271	578	470	302	600	400	460
1255/600	40	17,3	8,7	1,271	675	549	353	700	500	560
1755/500	40	20,5	10,7	1,254	807	658	425	800	600	460
1755/600	40	23,7	12,1	1,254	941	768	496	900	700	560

Thermal power measuring follows in accordance with EN 442.  
 Chrome surface treatment reduces heating capacity by ~30 %.  
 Accessories (page 64, 65 and 66) is not part of the radiator.



Connection options

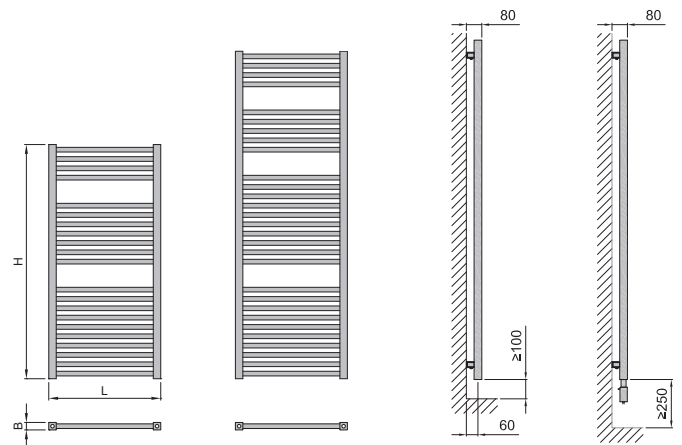

DQUA 1255 0500...  
DQUA 1255 0600...

DQUA 1755 0500...  
DQUA 1755 0600...