

# mini aqua®

PART NO. FP2406/2

GB

## DESCRIPTION

Using the proven functionality of our other mini pumps, the Mini Aqua® is incredibly slim in size. It is designed to give the installation flexibility where the latest generation of A/C units are becoming even smaller. Our new 'Plug & Play' system means you can simply disconnect, making for a safer & easier install and be up and running in minutes.


The Aspen Mini Aqua® pump is designed to be installed:

- Within wall mounted evaporators
- In plastic conduit

## IN THE BOX


- 1 x Mini Aqua® pump
- 1 x Anti Siphoning Device
- 1 x Assembled reservoir including filter, float and lid
- 1 x 150mm Vinyl breather tube 6mm ID
- 1 x 1.5m Suction tube 6mm ID
- 1 x 220mm Blue Inlet hose 14mm ID
- 1 x Drain tray connector
- 2 x Velcro strips
- 2 x Cable ties 140 x 3.6mm
- 4 x Cable ties 300 x 3.6mm
- 1 x 1.3m Power Cable

## SPECIFICATIONS

- Pump rating: 230V AC, 16W
- 1PH 50/60 Hz
- High level safety switch with 3A volt-free wires, and normally closed contacts
- Hall effect semi conductor level sensors
- Maximum water temperature: 40°C
- Class II appliance 
- Fully potted
- Thermally protected
- 28mm (h) x 185mm (w) x 28mm (d)
- Weight: 321g

## PERFORMANCE

- 12L/h Max. Flow
- 10m/33ft Max. Recommended Head
- 100m Max. Horizontal Flow
- 21dB(A) @ 1m

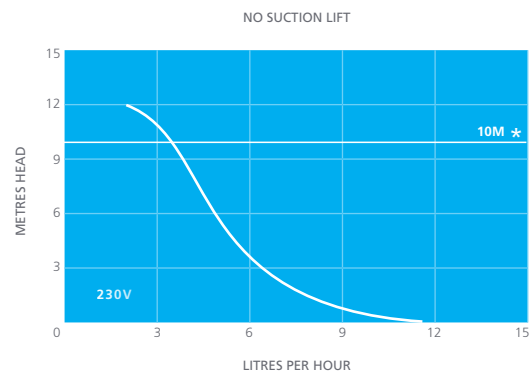

\* Max. recommended head  
All figures based on 50Hz pump rating